

HSF RoHS

SPECIFICATIONS PERFORMANCE

信号端子 Current Rating: 0.5A
 电源端子 Current Rating: 5A
 Contact Resistance: 80mΩ Max
 Insulation Resistance: 500MΩ Min
 Withstand Volt: 200V AC/minute
 Opratng Temperature: -40°C to +105°C

Material

Contact: Phosphor Bronze, 3u" MIN Gold Plated In Contact Area,
 Gold Flash Plated In Solder Area,
 50u"~240u" Nickel Underplated Over all.
 Ground: Brass, 80u" Min Matte Tin Plated Over
 50u" Min Nickel Underplated Over all.
 Housing: LCP Black, UL94V0
 Max. Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

Ordering Information

3726 F XXX 060 XX F R 0X

F=Female
 M=Male
 No. of pins
 30P~120P
 Plastic Hight
 060=6.0mm
 Contact Plating
 S0:1U" Gold/Tin
 S1:3U" Gold/Tin
 S2:5U" Gold/Tin
 S3:10U" Gold/Tin
 S4:15U" Gold/Tin
 S5:30U" Gold/Tin
 Insulator
 Material
 Option
 D=BK-PA46
 E=BK-PA9T
 F=BK-LCP
 Packing
 T:Tube
 R:Reel
 code stream
 01~99






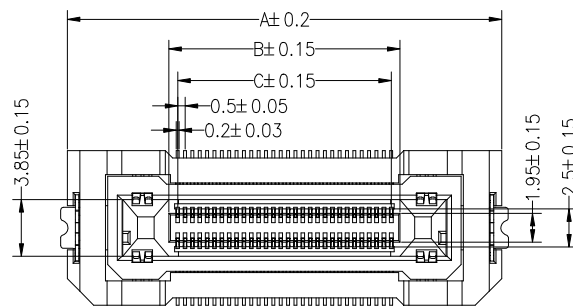


TABLE:

No. OF PIN	A	B	C	D	E
30 PIN	22.00	8.30	7.00	11.80	20.00
50 PIN	27.00	13.30	12.00	16.80	25.00
60 PIN	29.50	15.70	14.50	19.30	27.50
80 PIN	34.50	20.70	19.50	24.30	32.50
100 PIN	39.50	25.70	24.50	29.30	37.50
120 PIN	44.50	30.70	29.50	34.30	42.50

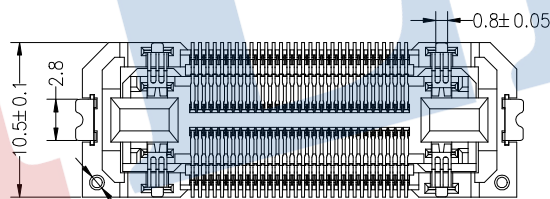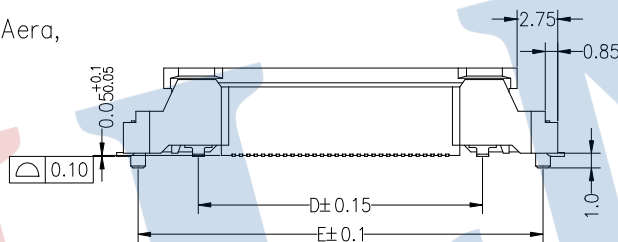

RECOMMENDED PCB LAYOUT(TOP SIDE)
 PCB BOARD TOLFRANC±0.05(PCB T=1.00mm)

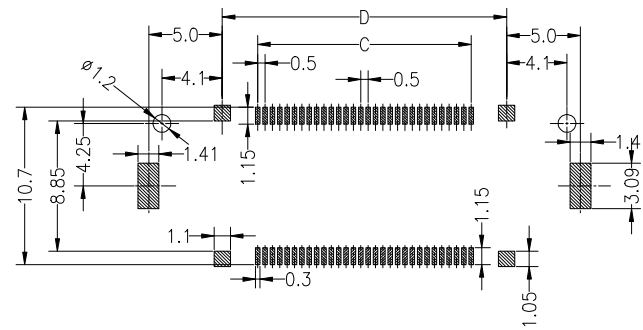

OPERATION		DRAW	Jelly Feng	22.06.30
X.X	±0.30	CHECK		
X.XX	±0.20			
X.XXX	±0.10	APPROVE		
Angle	±3°			
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	◆

JILN® 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

A0	2022.06.30	NEW DRAWING	CHANGE
REV	DATE	MODIFICATION DESCRIPTION	CHANGE
1	2	3	4

PART NO. 3726FXXX060XXFX0X
 TITLE: 0.5mm 高频大电流浮动式 BTB NPin 母座 SMT