

**HSF** RoHS

SPECIFICATIONS  
PERFORMANCE

Electical Rating: AC/DC 50V 0.5A

Insulation Resistance: 500MΩ

Withstang Volt: 200V AC/minute

Opratng Temperature: -40°C to +105°C



Material

Contact: Phosphor Bronze




Plating: Au or Sn Over Ni

Housing: LCP

Max.Processing Temp: 260°C ± 5° 5S

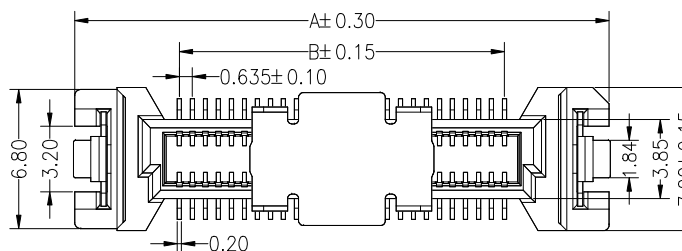

MATING DRAWING(REF)

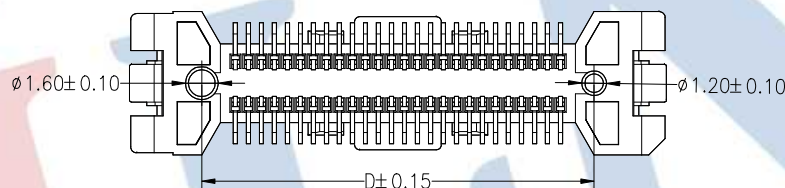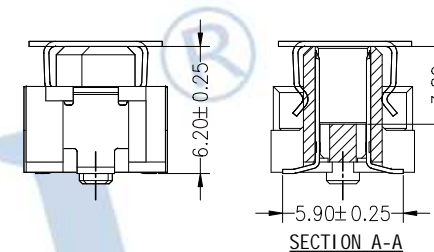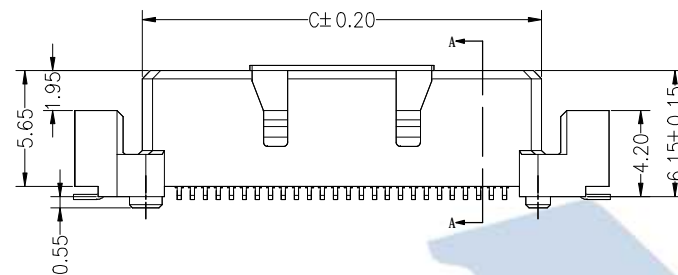

### Ordering Information

3722 F XXX 062 XX X X 0X

F=Female  
M=Male


No.of pins  
30,40,  
50,52P

Plastic Hight  
062=6.2mm

Contact Plating  
G0:Gold Flash  
G1:3U" Gold  
G2:5U" Gold  
G3:10U" Gold  
G4:15U" Gold  
S0:1.5U" Gold/Tin  
S1:3U" Gold/Tin

Insulator  
Material  
Option  
D=BK-PA46  
E=BK-PA9T  
F=BK-LCP

Packing  
T:Tube  
R:Reel

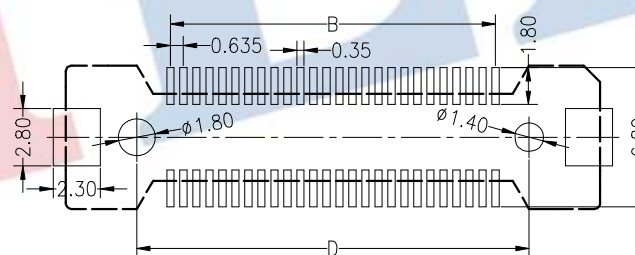

P.C.B Layout

No Of Pins	Dimensions (mm)			
	A	B	C	D
30	19.12	8.89	12.52	12.18
40	22.29	12.07	15.69	15.35
50	25.47	15.24	18.87	18.53
52	26.10	15.88	19.50	19.16

OPERATION		DRAW	Jelly Feng	2022.12.17	SCALE	FIT
X.X	±0.30	CHECK			UNIT	mm
X.XX	±0.20				SIZE	A4
X.XXX	±0.10				SHEET	1/1
Angle	±3°	APPROVE			PROJ.	
DIM	TOL				TITLE:	0.635mm BTB NPin H6.2 Female (PLC专用)

**JILN** 深圳市锦凌电子有限公司  
SHENZHEN JINLING ELECTRONICS CO.,LTD  
Tel : 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO. 3722FXXX062XXXX0X  
TITLE: 0.635mm BTB NPin H6.2 Female (PLC专用)

A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2022.12.17	NEW DRAWING	

A