

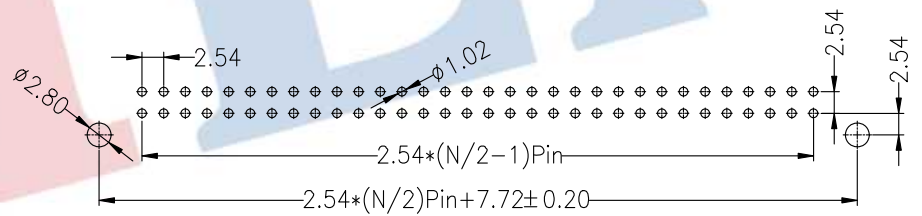
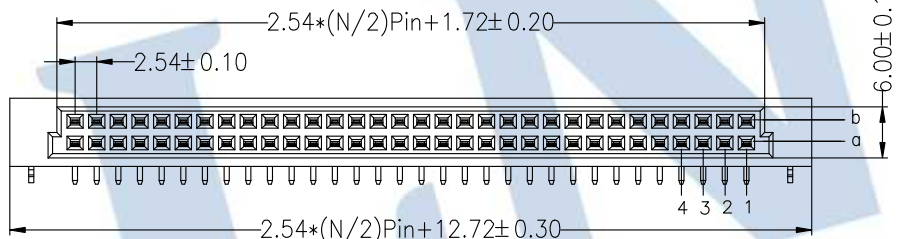



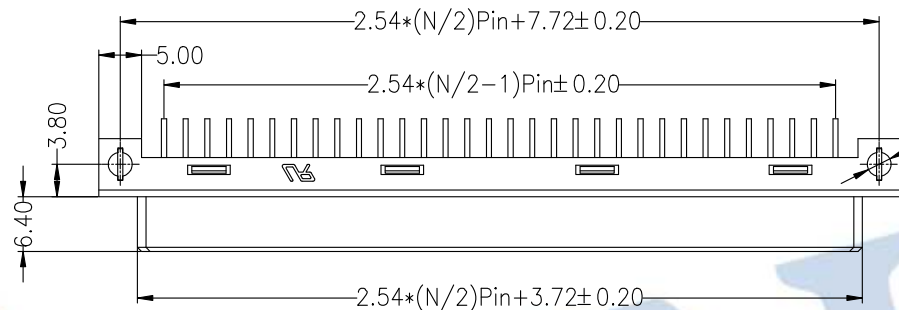

**SPECIFICATIONS**

Rated Current: 3.0AMP  
 Contact Resistance: 30mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C

Contact Material: Brass  
 Contact Plating: Au or Sn Over Ni  
 Insulator Material: Polyester(UL94V-0)  
 Resistance To Soldering Heat:  
 245°C±5°C, 10s(PBT insulator)

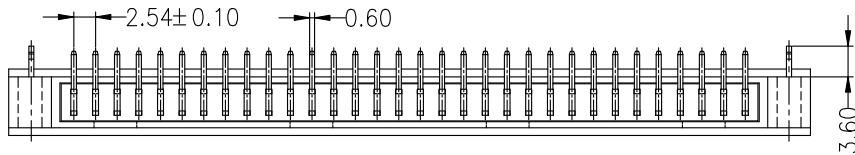

**Ordering Information**

**35112 XX B F R XX B WAX**

No. of Pins NPin N=10、16、20、 32、44、48、64	Contact Type F=Female	Contact Plating G0:Gold Flash S0:Gold Flash/Tin S1:3U" Gold/Tin S2:5U" Gold/Tin S3:10U" Gold/Tin S4:15U" Gold/Tin	Stream Code
---	--------------------------	---	-------------

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

Dimension antitheses list	
ITEM	A
Standard	2.90

				OPERATION	DRAW	YiYuSheng	14.09.16	SCALE	FIT	<b>JILN</b> ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30			UNIT	mm		
B	2014.09.16	增加UL标识		X.XX	±0.20	CHECK		SIZE	A4		
A0	2014.04.11	NEW DRAWING		X.XXX	±0.10			SHEET	1/1		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	±3°	APPROVE		PROJ.	◆		
				DIM	TOL					PART NO.	35112XXBFRXXBWAX
										TITLE:	欧式插座 母座 90度 2xNP 带鱼叉成品系列图