




SPECIFICATIONS

Rated Current:3.0AMP
 Contact Resistance:30mΩ Max
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Copper Alloy
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Resistance To Soldering Heat:
 245°C±5°C For 5~10 Second(PBT insulator)

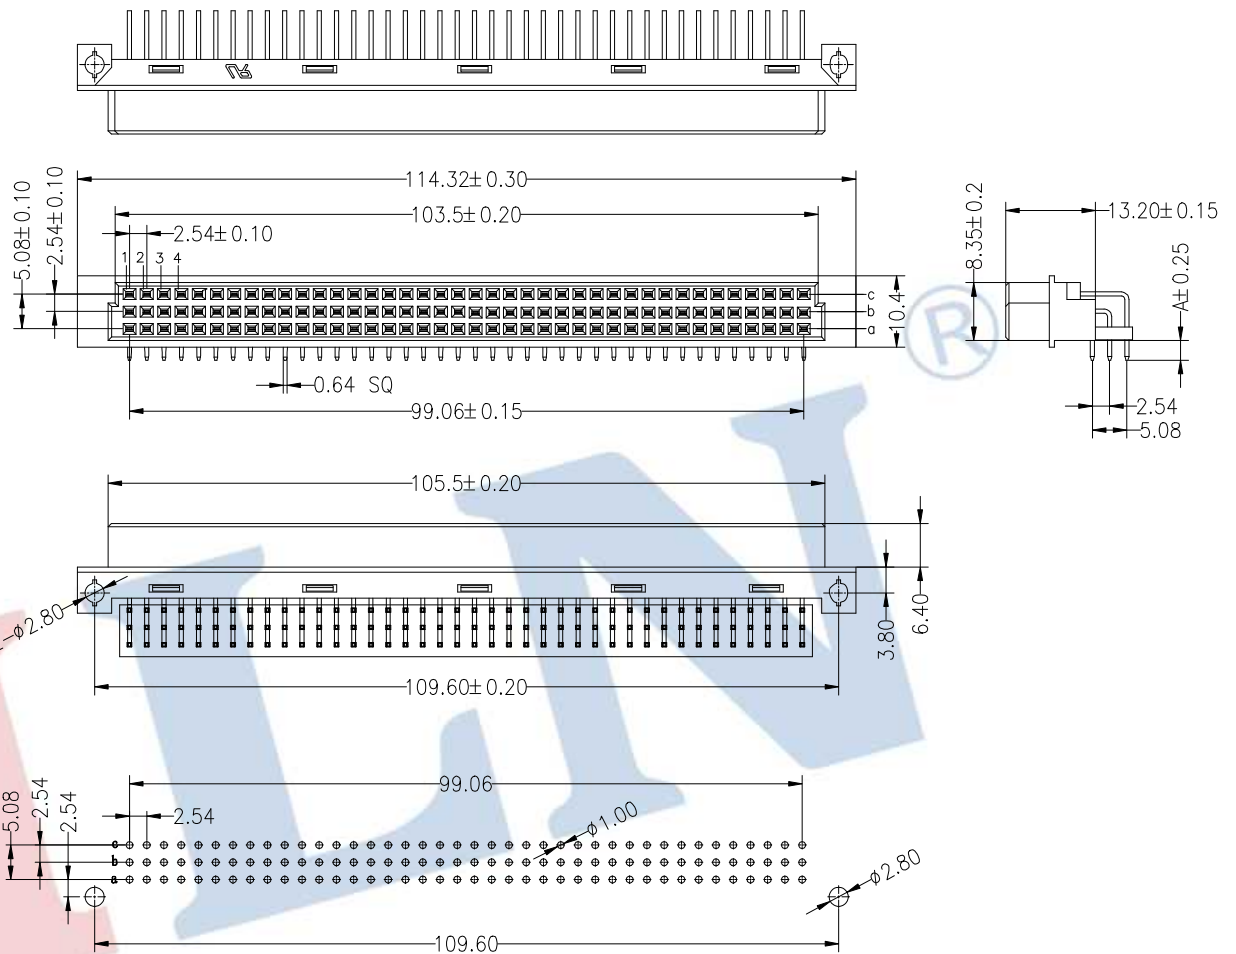

Ordering Information

3511 3 120 A F R XX X N A X

No. of Pins NPin N=120	Contact Type F=Female	Contact Plating G0:Gold Flash S0:Gold Flash/Tin S1:30U" Gold/Tin S2:50U" Gold/Tin S3:10U" Gold/Tin S4:15U" Gold/Tin S5:30U" Gold/Tin	Contact Material B=Brass P=Phosphor Bronze	Stream Code
------------------------------	--------------------------	---	--	-------------

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE± 0.05)

Dimension antitheses list	
ITEM	A
Standard	2.90

				OPERATION		DRAW	Jelly Feng	2023.03.29	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK		SIZE	A4	PART NO. 35113120AFRXXXNAX		
				X.XXX	±0.10		SHEET	1/1				
A0	2023.03.29	NEW DRAWING		Angle	±3°	APPROVE		PROJ.		TITLE:	欧式插座 母座 90度 无鱼叉 成品系列图	
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL							