






# HSF RoHS

## SPECIFICATIONS PERFORMANCE

Electical Rating: AC/DC 50V 0.5A  
 Contact Resistance: 80mΩ Max  
 Insulation Resistance: 500MΩ Min  
 Withstand Volt: 500V AC/minute  
 Opratng Temperature: -40°C to +105°C

Material  
 Contact: Phosphor Bronze Gold-Plated  
 Housing: LCP UL94V0  
 Max. Processing Temp: 260°C ± 5° 5S

Dimension Table					
No Of Pins	Dim A	Dim B	Dim C	Dim D	Dim E
60	27.35	20.45	18.42	21.05	23.35
80	33.70	26.80	24.77	27.40	29.70

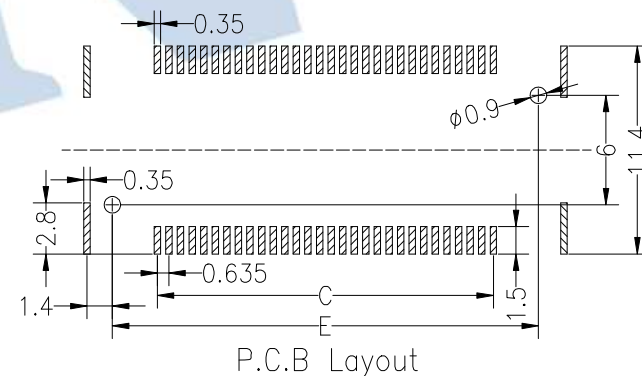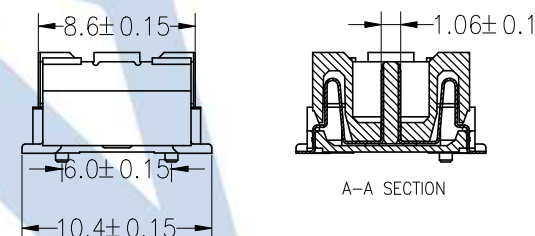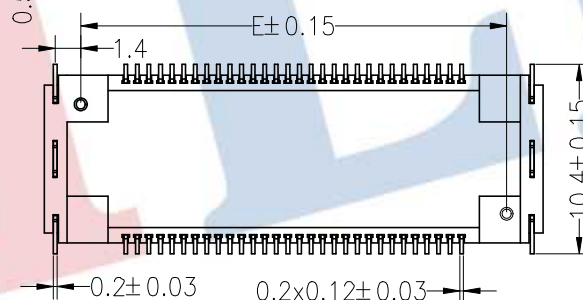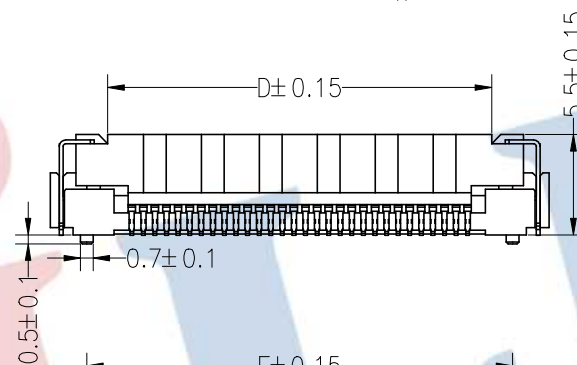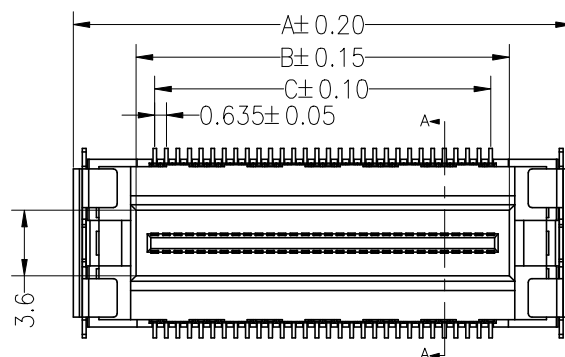

## Ordering Information

**3724 F XXX 055 XX X X 0X**

F=Female M=Male	No.of pins NPin N=60,80	Plastic Hight 055=5.5mm	Contact Plating G0:Gold Flash G1:3U" Gold G2:5U" Gold G3:10U" Gold G4:15U" Gold S0:1.5U" Gold/Tin S1:3U" Gold/Tin	Insulator Material Option D=BK-PA46 E=BK-PA9T F=BK-LCP	Packing T:Tube R:Reel M:Reel+Mylar
--------------------	-------------------------------	----------------------------	--	---	---

OPERATION		DRAW	Jelly Feng	2022.07.08	SCALE	FIT
X.X	±0.30					
X.XX	±0.20	CHECK			UNIT	mm
X.XXX	±0.10				SIZE	A4
Angle	±3°	APPROVE			SHEET	1/1
DIM	TOL				PROJ.	☉

**JILN**® 深圳市锦凌电子有限公司  
 SHENZHEN JINLING ELECTRONICS CO.,LTD  
 Tel: 86-755-27483253 Fax: 86-755-2997-5588

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2022.07.08	NEW DRAWING	

PART NO. 3724FXXX055XXXX0X  
 TITLE: 0.635mm 浮动式BTB NPin H5.5 Female 第二代